


Maximum pressure in the tank	0.3 MPa
Maximum heating water temperature in the tank	90 °C
Maximum pressure in the exchanger	1.0 MPa
Maximum heating water temperature in the exchanger	110 °C
Maximum pressure in the exchanger	0.6 MPa
Maximum heating water temperature in the exchanger	90 °C

NADO 500 v3

NADO 750 v3

NADO 1000 v3

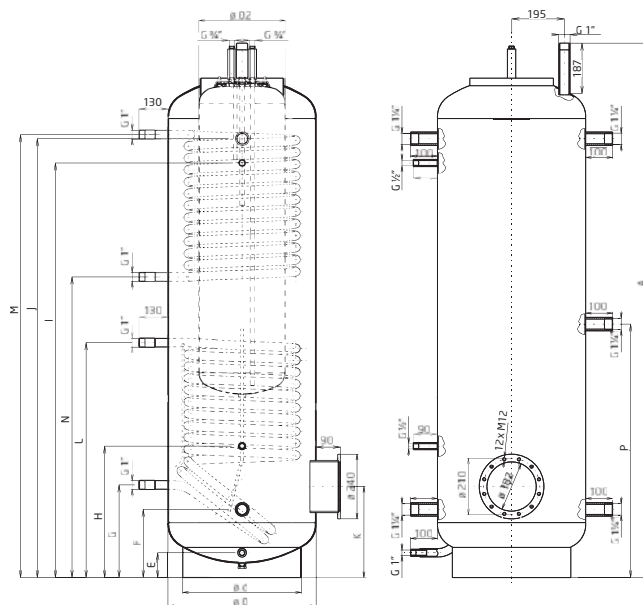

NADO v3 storage vessels may be provided with a flange with 210 mm screw spacing for a TPK heating unit installation. The flange is plugged in the basic design. Tank contains an inner enameled vessel with a capacity of 100 liters and two exchangers, with a heating surface 1.5 m² each, for other heating source connection (for example solar system). The number and positioning of sockets may vary and can be customized upon requirements.

Accumulation tanks are supplied with a high-quality insulation Symbio made of polyester fleece.



Volume [l]	Diameter DDiameter d [mm]	Diameter D2 [mm]	A	E	F	G	H	I	J	K	L	M	N	P	
500	600	440	320	1990	90	260	350	494	1545	1635	344	875	1647	1119	943
750	750	550	320	2020	90	272	362	506	1557	1647	356	887	1659	1131	955
1000	850	600	320	2053	90	287	377	521	1572	1662	371	902	1674	1146	970